
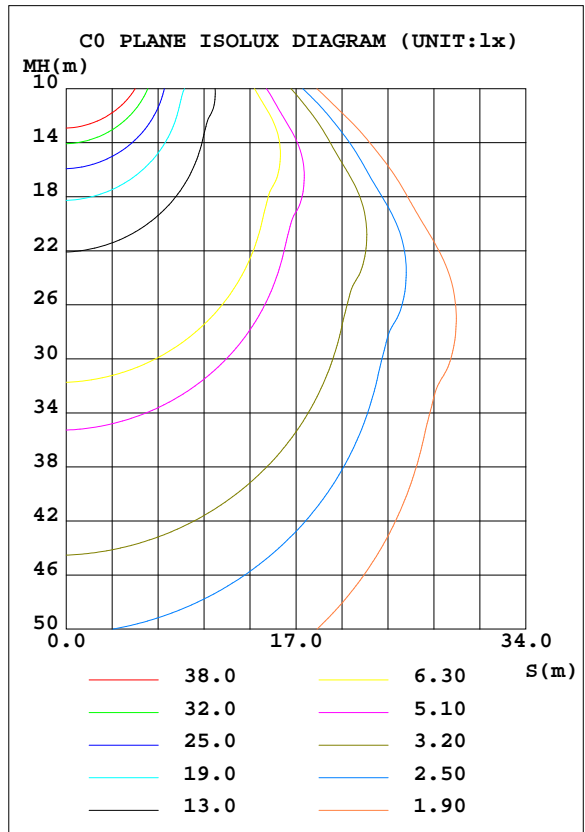


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.8V I:0.6538A P:146.0W PF:0.9718 Lamp Flux:18166.5x1 lm		
NAME: 高吊灯	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.42 lm/W			
MODEL		I _{max} (cd)	6364	S/MH(C0/180)	1.35
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	18166	η UP, DN(C0-180)	0.6,51.6
NOMINAL FLUX(lm)	18166.5	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.7,47.1
LAMPS INSIDE	1	η up(%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	98.7	CIBSE SHR MAX	1.35

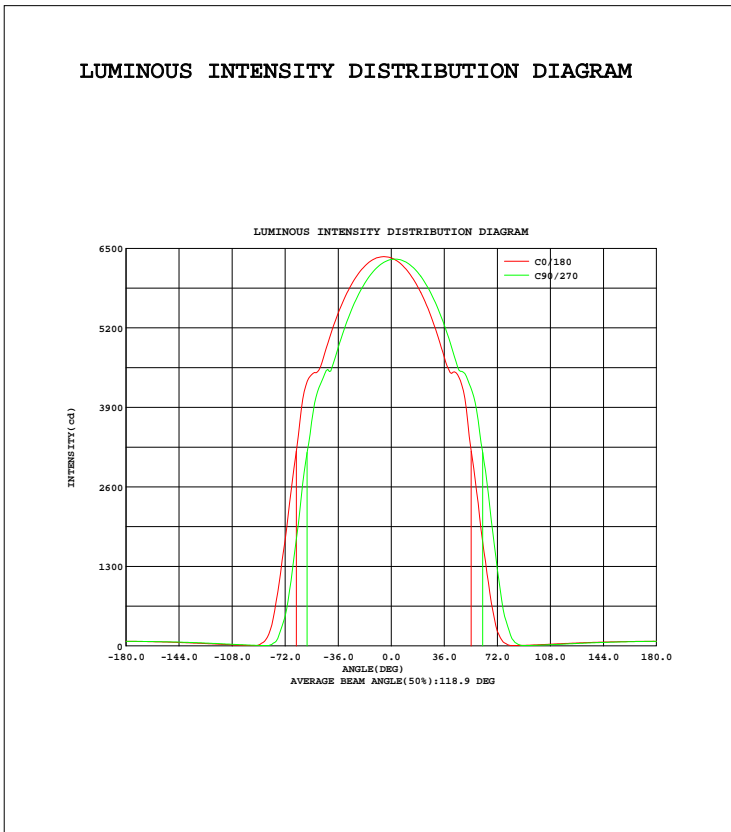

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	6161	6208	6276	6344	6343	6277	6177	6089	0- 10	599.2	599.2	3.3,3.3
20	5781	5889	6045	6197	6156	6032	5845	5670	10- 20	1727	2326	12.8,12.8
30	5185	5361	5612	5851	5770	5588	5306	5031	20- 30	2642	4968	27.3,27.3
40	4469	4617	4960	5298	5172	4924	4564	4489	30- 40	3219	8187	45.1,45.1
50	4045	4208	4452	4555	4480	4446	4153	3619	40- 50	3516	11702	64.4,64.4
60	2102	2779	3497	4171	4036	3395	2663	1762	50- 60	3324	15026	82.7,82.7
70	448.4	833.7	1644	2559	2119	1559	734.5	272.9	60- 70	2118	17144	94.4,94.4
80	10.64	49.45	253.8	693.0	459.0	206.5	45.04	5.586	70- 80	701.9	17846	98.2,98.2
90	9.315	7.324	5.506	40.01	13.36	5.903	8.189	11.71	80- 90	83.29	17929	98.7,98.7
100	19.01	15.78	11.38	7.817	9.833	12.64	17.35	22.41	90-100	12.42	17942	98.8,98.8
110	30.54	26.85	21.63	16.83	20.08	23.56	28.87	34.35	100-110	20.91	17963	98.9,98.9
120	41.84	38.40	33.06	28.01	31.81	35.24	40.45	45.51	110-120	30.77	17993	99,99
130	51.81	48.63	44.19	39.19	42.97	45.95	50.91	54.79	120-130	37.69	18031	99.3,99.3
140	59.86	57.25	53.75	49.16	52.90	55.45	59.35	62.26	130-140	40.02	18071	99.5,99.5
150	66.22	64.52	61.96	58.62	61.35	63.08	65.65	67.53	140-150	37.61	18109	99.7,99.7
160	70.85	69.62	67.92	65.91	67.72	68.53	70.17	71.63	150-160	30.66	18139	99.9,99.9
170	74.64	74.07	72.44	71.06	72.36	73.11	73.81	74.64	160-170	20.11	18159	100,100
180	75.66	75.74	75.19	75.07	75.70	75.75	75.22	75.05	170-180	7.079	18166	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 9920.2 lm

%lum = 54.6%

%lamp = 54.6%

Conical surface Flux(120deg): 15026 lm


%lum = 82.7%

%lamp = 82.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

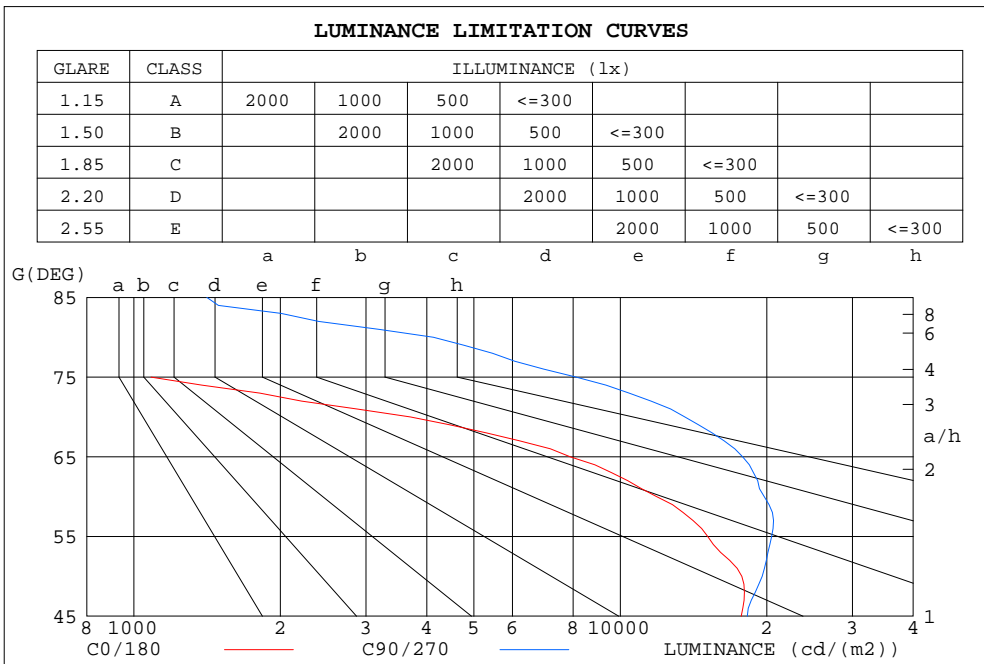


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	196	1412
80	173	4128
75	1084	8115
70	3704	13577
65	7891	17836
60	11873	19758
55	15129	20459
50	17776	19565
45	17720	18233

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.98	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.90	.89	.87	.85
2.0	.92	.86	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.73	.68	.64	.71	.66	.62	.60
4.0	.72	.63	.57	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.51
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.41	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.36	.30	.26	.24

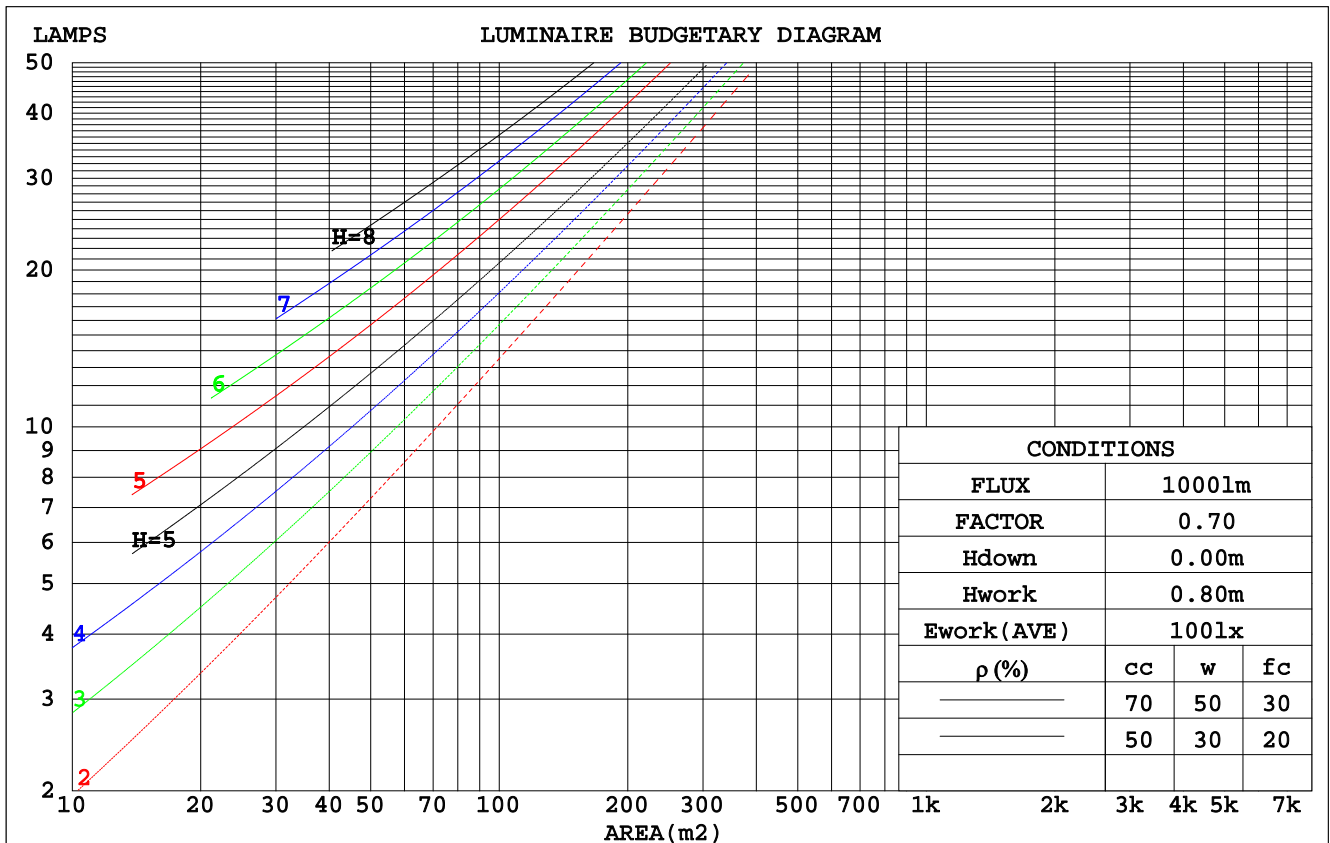

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.281	.160	.051	.273	.156	.050	.260	.149	.048	.247	.142	.046	.235	.136	.044	
2.0	.273	.150	.046	.267	.147	.045	.254	.141	.044	.243	.136	.043	.233	.132	.041	
3.0	.258	.137	.041	.252	.135	.041	.241	.131	.040	.231	.127	.039	.222	.123	.038	
4.0	.241	.125	.037	.236	.123	.036	.226	.120	.036	.217	.116	.035	.209	.113	.035	
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.196	.105	.031	
6.0	.209	.105	.030	.205	.104	.030	.198	.101	.029	.190	.099	.029	.184	.097	.029	
7.0	.196	.097	.027	.192	.096	.027	.185	.094	.027	.179	.092	.027	.173	.090	.026	
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.164	.081	.023	.158	.079	.023	.153	.078	.023	
10.0	.162	.078	.022	.159	.077	.021	.154	.076	.021	.150	.074	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.147	.161	.143	.126	.110	.098	.087	.063	.057	.051	.020	.018	.016	
2.0	.180	.142	.110	.154	.122	.095	.106	.085	.067	.061	.049	.039	.020	.016	.013	
3.0	.172	.124	.086	.148	.107	.075	.101	.075	.052	.059	.044	.031	.019	.014	.010	
4.0	.165	.111	.070	.142	.096	.061	.097	.067	.043	.056	.039	.025	.018	.013	.008	
5.0	.158	.101	.058	.136	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
6.0	.151	.092	.050	.130	.080	.044	.090	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.145	.085	.044	.124	.074	.038	.086	.052	.027	.050	.031	.016	.016	.010	.005	
8.0	.138	.080	.039	.119	.069	.034	.082	.048	.024	.048	.029	.014	.016	.009	.005	
9.0	.132	.075	.036	.114	.065	.031	.079	.046	.022	.046	.027	.013	.015	.009	.004	
10.0	.127	.070	.033	.109	.061	.029	.076	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.5	22.4	23.8	24.0	23.4	24.9	23.7	25.1	25.3
3H	22.3	23.6	22.6	23.9	24.2	24.4	25.8	24.7	26.0	26.3
4H	22.2	23.5	22.5	23.8	24.0	24.5	25.8	24.9	26.1	26.4
6H	22.1	23.3	22.4	23.6	23.9	24.5	25.7	24.9	26.0	26.3
8H	22.0	23.2	22.4	23.5	23.8	24.5	25.6	24.8	25.9	26.2
12H	22.0	23.1	22.4	23.4	23.7	24.4	25.5	24.8	25.8	26.2
4H 2H	22.5	23.8	22.9	24.1	24.4	23.6	24.9	24.0	25.2	25.5
3H	22.8	23.9	23.2	24.2	24.6	24.7	25.8	25.0	26.1	26.4
4H	22.7	23.7	23.1	24.1	24.4	24.8	25.8	25.2	26.2	26.5
6H	22.6	23.5	23.1	23.9	24.3	24.8	25.7	25.2	26.1	26.5
8H	22.6	23.4	23.0	23.8	24.2	24.8	25.6	25.2	26.0	26.4
12H	22.5	23.3	23.0	23.7	24.1	24.7	25.5	25.2	25.9	26.3
8H 4H	22.7	23.5	23.1	23.9	24.3	24.7	25.5	25.1	25.9	26.3
6H	22.6	23.3	23.1	23.7	24.1	24.7	25.4	25.2	25.8	26.3
8H	22.6	23.1	23.0	23.6	24.1	24.7	25.3	25.2	25.7	26.2
12H	22.5	23.0	23.0	23.5	24.0	24.6	25.2	25.1	25.6	26.1
12H 4H	22.6	23.4	23.1	23.8	24.2	24.7	25.4	25.1	25.8	26.3
6H	22.6	23.1	23.0	23.6	24.1	24.7	25.3	25.1	25.7	26.2
8H	22.5	23.0	23.0	23.5	24.0	24.6	25.1	25.1	25.6	26.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.5					+ 0.1 / - 0.2				
1.5H	+ 0.7 / - 1.4					+ 0.5 / - 0.5				
2.0H	+ 1.0 / - 1.7					+ 0.8 / - 1.0				

CIE Pub.117 Corrected 18166 lm Total Lamp Luminous Flux.(8log(F/F0) = 10.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	56	45	38	55	45	38	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	77	66	59	75	65	58	73	66	58	51
1.25	84	74	67	83	73	67	80	72	66	58
1.50	89	80	73	87	79	72	84	77	71	64
2.00	96	88	82	94	87	81	91	84	79	72
2.50	100	93	87	98	91	86	94	88	84	76
3.00	103	97	92	101	95	91	97	92	88	80
4.00	107	102	97	105	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

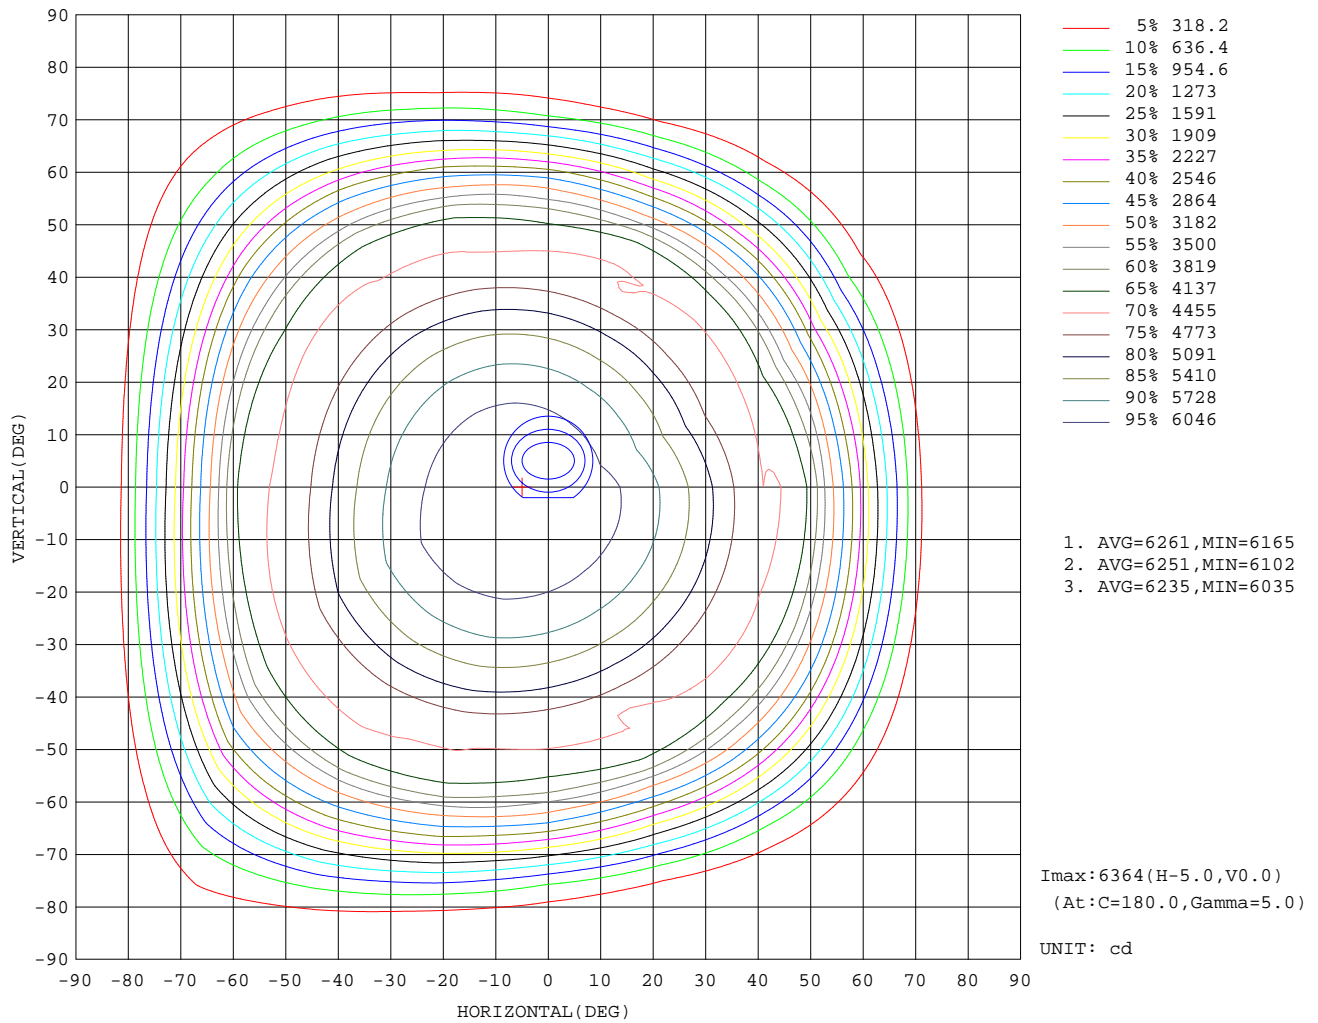

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

AAI Figure

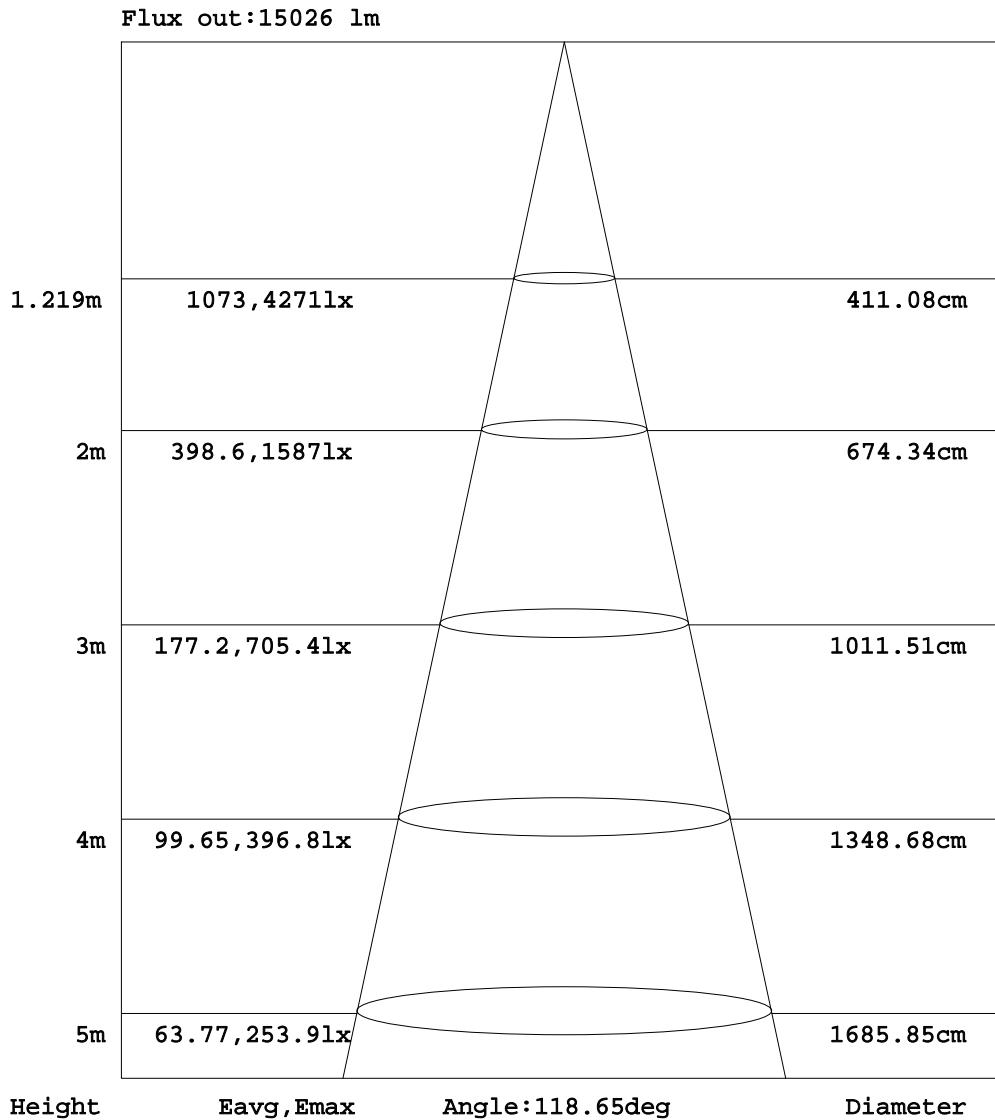


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

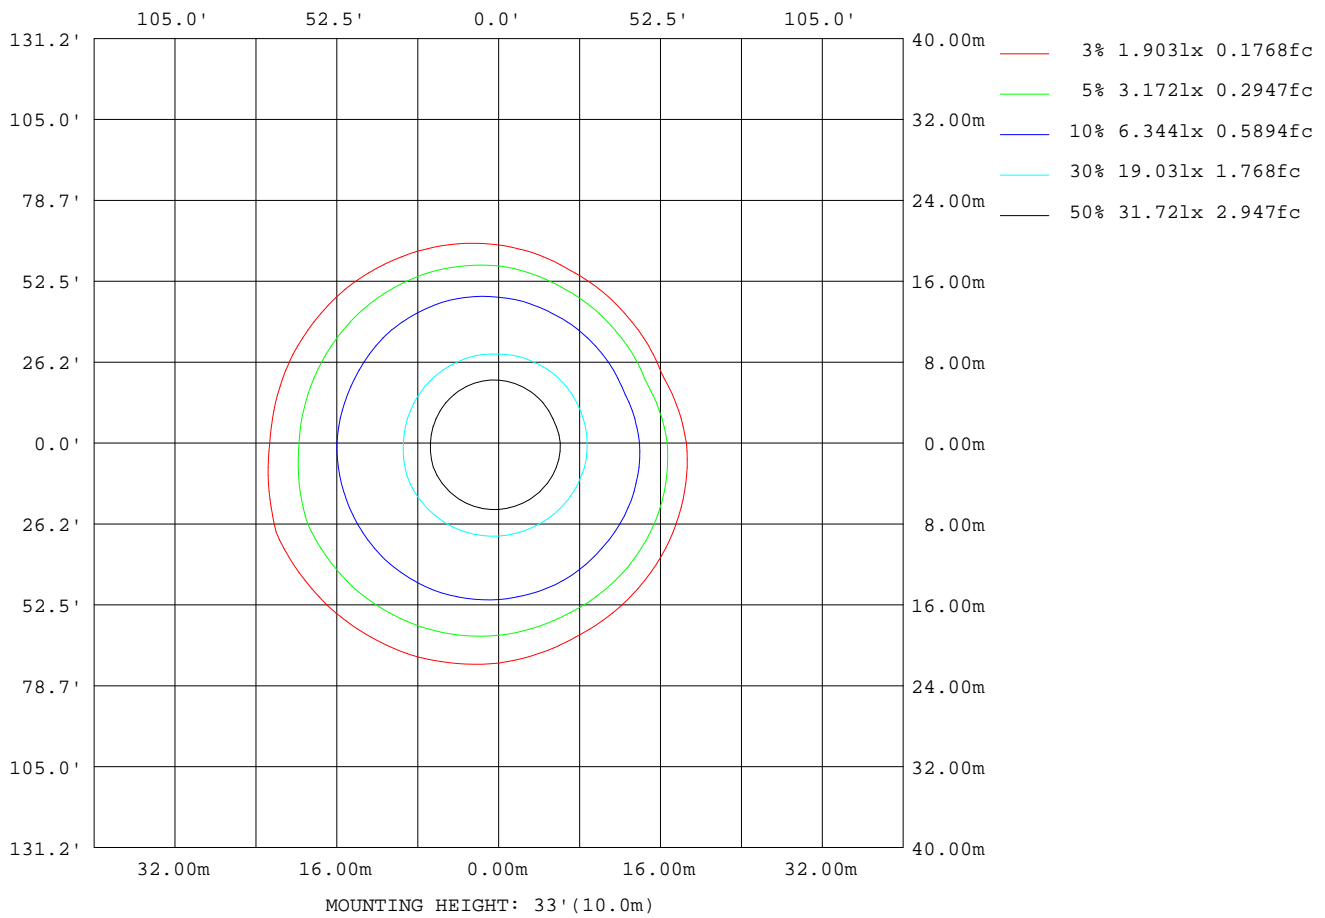

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:229.8V I:0.6538A P:146.0W PF:0.9718 Lamp Flux:18166.5x1 lm		
NAME: 高吊灯	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	14219
L_0~180(75)av	7107
L_0~180(85)av	1806
L_90~270(65)av	14349
L_90~270(75)av	5463
L_90~270(85)av	800
L_45(65)av	14281
L_45(75)av	7073
L_45(85)av	1911

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

Planar Illuminance Curve

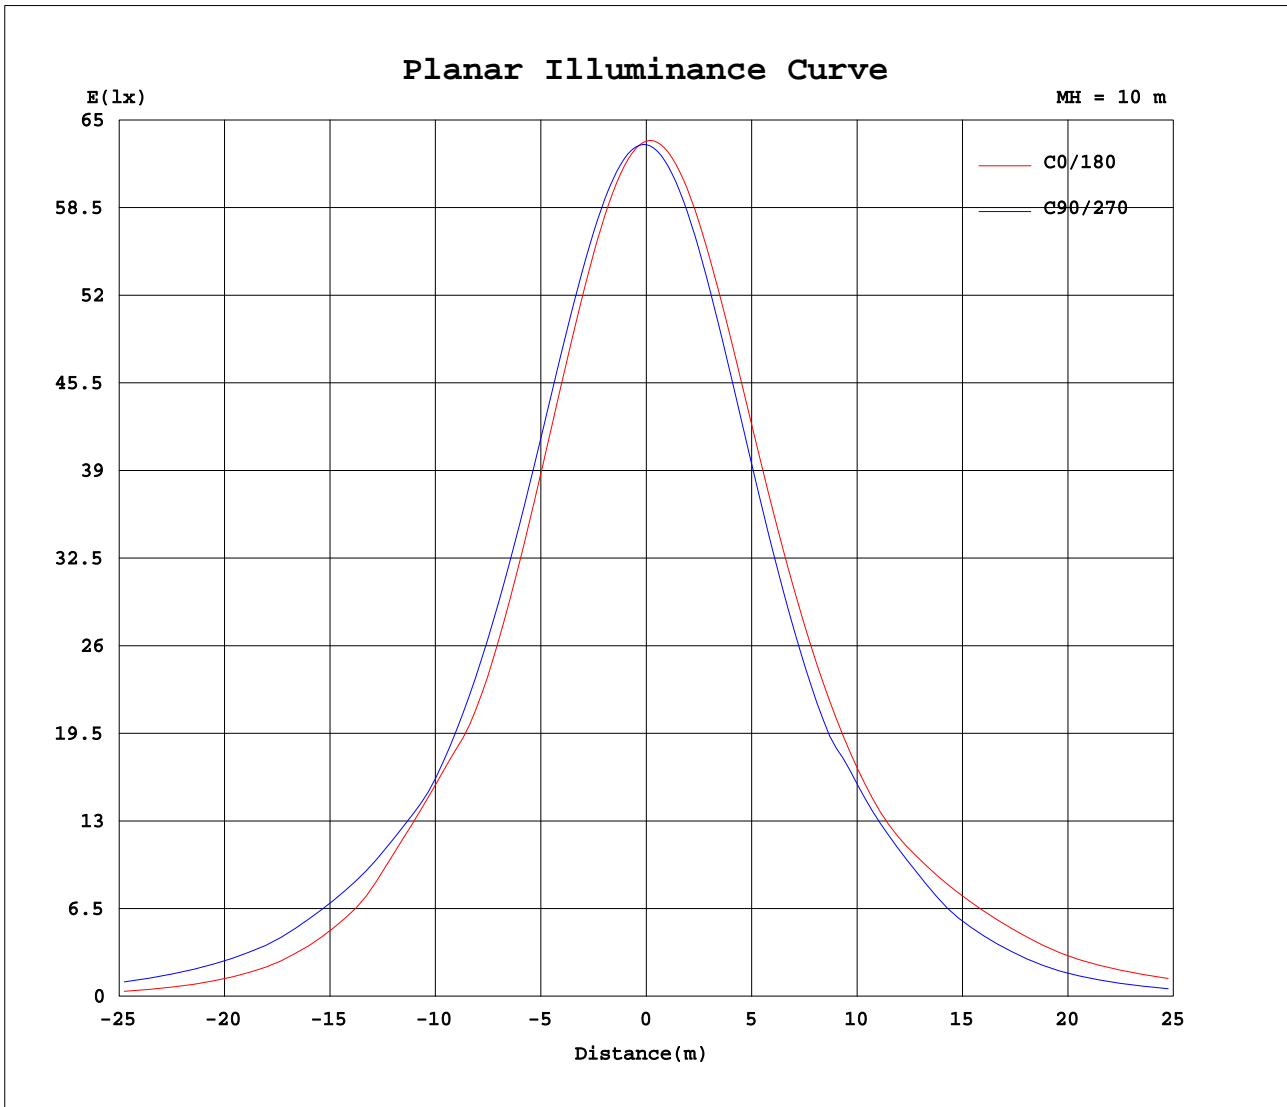

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	6344	6340	6334	6325	6318	6313	6310	6308	6344	6340	6334	6325	6318	6313	6310	6308			
5	6276	6286	6294	6303	6319	6337	6349	6354	6364	6347	6328	6301	6271	6243	6223	6212			
10	6161	6186	6208	6236	6276	6317	6344	6356	6343	6311	6277	6231	6177	6125	6089	6070			
15	5996	6038	6074	6122	6185	6250	6294	6316	6273	6227	6179	6114	6037	5958	5905	5876			
20	5781	5838	5889	5957	6045	6136	6197	6227	6156	6095	6032	5948	5845	5741	5670	5632			
25	5514	5587	5653	5740	5854	5972	6050	6091	5989	5913	5835	5731	5604	5471	5379	5330			
30	5185	5277	5361	5471	5612	5755	5851	5902	5770	5681	5588	5462	5306	5143	5031	4972			
35	4803	4912	5013	5145	5315	5488	5602	5664	5499	5394	5283	5137	4952	4761	4634	4589			
40	4469	4529	4617	4764	4960	5163	5298	5370	5172	5050	4924	4757	4564	4448	4489	4476			
45	4435	4443	4494	4434	4564	4784	4939	5021	4792	4658	4544	4490	4453	4416	4254	4152			
50	4045	4139	4208	4406	4452	4485	4555	4637	4480	4530	4446	4395	4153	3998	3619	3444			
55	3072	3334	3585	4009	4154	4380	4463	4489	4407	4231	4173	3957	3462	3027	2783	2636			
60	2102	2475	2779	3052	3497	3979	4171	4179	4036	3688	3395	3055	2663	2064	1762	1605			
65	1181	1474	1755	2091	2668	3086	3392	3594	3074	2872	2545	2073	1625	1155	854	712			
70	448	606	834	1162	1644	2164	2559	2789	2119	1850	1559	1157	735	424	273	216			
75	99.3	162	262	423	744	1213	1571	1770	1203	950	707	453	258	98.9	52.3	33.1			
80	10.6	24.9	49.4	93.5	254	454	693	862	459	325	206	113	45.0	9.04	5.59	5.82			
85	6.04	5.74	5.39	12.6	43.6	102	181	279	105	64.2	42.0	13.1	5.82	6.58	7.83	8.30			
90	9.31	8.26	7.32	6.02	5.51	15.2	40.0	50.0	13.4	5.47	5.90	6.49	8.19	10.1	11.7	12.5			
95	13.8	12.3	11.0	9.37	7.61	5.92	5.52	5.21	6.29	7.34	8.41	9.98	12.3	14.8	16.8	17.7			
100	19.0	17.4	15.8	13.7	11.4	9.19	7.82	7.07	9.83	11.2	12.6	14.7	17.3	20.3	22.4	23.5			
105	24.7	22.9	21.1	18.9	16.2	13.6	11.9	10.9	14.6	16.2	17.9	20.1	23.0	26.1	28.3	29.5			
110	30.5	28.7	26.8	24.5	21.6	18.8	16.8	15.7	20.1	21.8	23.6	25.8	28.9	32.0	34.4	35.4			
115	36.4	34.5	32.7	30.2	27.3	24.3	22.3	21.1	25.9	27.6	29.4	31.7	34.8	37.9	40.2	41.1			
120	41.8	40.1	38.4	36.0	33.1	30.0	28.0	26.8	31.8	33.4	35.2	37.5	40.4	43.4	45.5	46.4			
125	47.0	45.4	43.7	41.5	38.8	35.8	33.7	32.5	37.6	39.1	40.8	42.9	45.9	48.5	50.5	51.2			
130	51.8	50.2	48.6	46.6	44.2	41.2	39.2	38.0	43.0	44.4	46.0	48.0	50.9	53.2	54.8	55.5			
135	56.0	54.6	53.2	51.3	49.2	46.2	44.3	43.1	48.0	49.4	50.8	52.7	55.4	57.4	58.7	59.5			
140	59.9	58.6	57.3	55.7	53.8	51.0	49.2	48.1	52.9	54.1	55.5	57.0	59.4	61.2	62.3	62.9			
145	63.4	62.1	61.1	59.8	58.1	55.6	54.0	53.0	57.5	58.4	59.6	60.9	62.9	64.4	65.3	65.8			
150	66.2	65.3	64.5	63.5	62.0	60.0	58.6	57.7	61.3	62.1	63.1	64.2	65.6	66.8	67.5	67.8			
155	68.6	67.9	67.2	66.5	65.4	63.8	62.7	62.1	64.9	65.4	66.1	66.9	68.0	69.0	69.6	69.9			
160	70.8	70.2	69.6	68.9	67.9	66.7	65.9	65.4	67.7	68.0	68.5	69.2	70.2	71.1	71.6	71.9			
165	73.1	72.5	71.9	71.4	70.3	69.0	68.4	68.2	70.2	70.4	70.9	71.3	72.3	73.1	73.4	73.6			
170	74.6	74.3	74.1	73.5	72.4	71.3	71.1	70.9	72.4	72.7	73.1	73.2	73.8	74.5	74.6	74.5			
175	75.7	75.5	75.5	75.0	74.3	73.6	73.5	73.3	74.2	74.3	74.5	74.4	74.7	75.0	75.3	75.0			
180	75.7	75.6	75.7	75.4	75.2	75.0	75.1	74.8	75.7	75.5	75.8	75.4	75.2	75.0	75.0	74.8			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 17 October 2018

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks: