



Hamburger

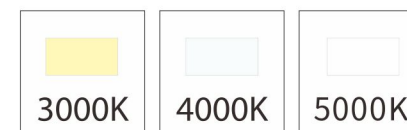

Item Code	Power	Voltage	Driver	Material	Lumen Efficiency	PF	RA	Beam angle	IP	Product Size (mm)
02CL-CX-20W	20W	AC175-240V	DOB	PP	80-90lm/w	0.5	>80	120°	65	φ200xH55
02CL-CX-30W	30W	AC175-240V	DOB	PP	80-90lm/w	0.9	>80	120°	65	φ300xH55
02CL-CX-40W	40W	AC175-240V	DOB	PP	80-90lm/w	0.9	>80	120°	65	φ400xH55

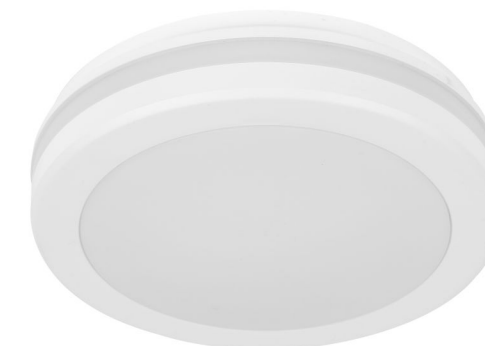

Item Code	Power	Voltage	Driver	Material	Lumen Efficiency	PF	RA	Beam angle	IP	Product Size (mm)
02CL-CX-20W	20W	AC175-265V	IC	PP	80-90lm/w	0.5	>80	120°	65	φ200xH55
02CL-CX-30W	30W	AC175-265V	IC	PP	80-90lm/w	0.9	>80	120°	65	φ300xH55
02CL-CX-40W	40W	AC175-265V	IC	PP	80-90lm/w	0.9	>80	120°	65	φ400xH55



Features:

- With tough polycarbonate and features a high-quality Anti-glare milky diffuser
- Adopt high lumen 2835 SMD Led Chip, Lumen: 80-90LM/W
- High quality IC Driver, Multiple protection, overload, under-voltage, short-circuit protection
- Stable performance and long life
- IP65 Waterproof, moisture proof, rust proof
- CE/RoHS/CB IP65 approval

Application:

- Kitchen, Toilet, Corridor, School, Building, Bedroom, Spa room, Hotel, Hospital, Meeting room, Showcase, Warehouse, Office, Supermarket, Department store