

Product Introduction

RUNWIN **Economic LED Floodlight** S-lite 2 is the fourth generation of RUNWIN's Die-casting Aluminium LED Flood Light family. This product series which we developed is focused on the price competition and higher performance cost for our Clients to win their markets. Since RUNWIN **Economic LED Floodlight** S-lite 2 was born two years ago, we have sold it all around the world with zero faulty. Our main market is South Africa, South America, Poland, Spain, Italy, the Middle East and so on. This series is also eco-friendly series for your market, so choose us, then we will help you to win your market. The full range can do from 10W to 200W including all watts!

Product Feature

- √ Material: Full Die-casting Aluminum housing with good heat dissipation.
- √ Lumen output: High lumen efficiency > 80lm/w
- √ Led chip: Equipped with famous domestic led chip brand Sanan® with SMD solution
- √ Driver: DOB linear solution with a high-performance cost
- √ With a unique breather valve to keep the balance of the air pressure inside and outside.
- √ IP65
- √ Lifespan: 25000 hours & two years warranty
- √ CE,RoHS,**New Erp** approved
- √ **PIR/Daylight/DC types are all available.**

Product Details


- √ Runwin Unique Breather Design - A Breathing Product!!!
To balance the air pressure inside and outside. Prevent extrusion deformation and water vapor caused by internal and external temperature differences.
- >>> Ensure better heat dissipation
- >>> Ensure a Longer lifespan
- >>> Safer, in case the glass deformed and shattered as the expansion and contraction



✓ New Upgrade Thicker Glass, advanced tempered glass, impact resistance.
4.0mm Glass, IK07 tempered glass, Explosion-proof, High transmittance

New Upgrade Thicker Glass

Advanced Tempered Glass, Impact Resistance

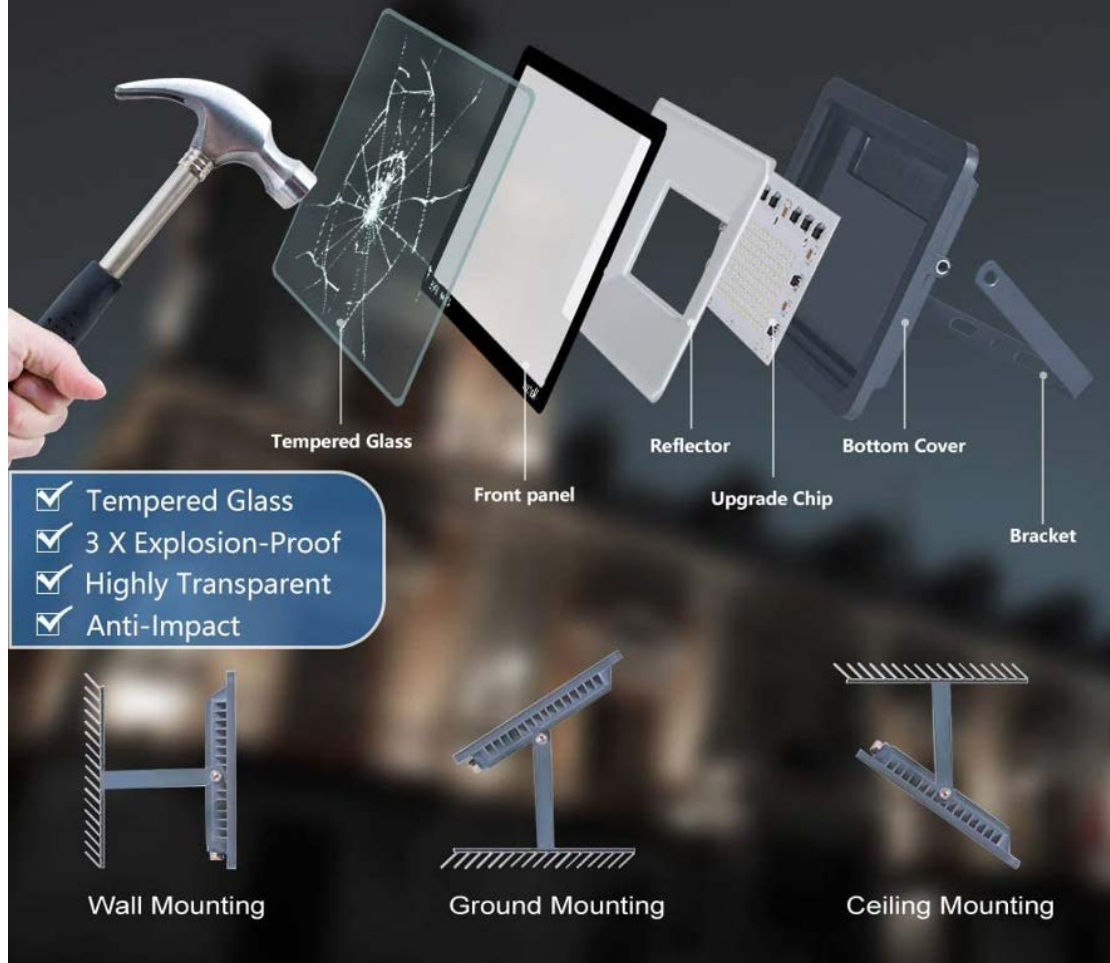


✓ Housing ADC #12 Aluminum, Die-cast aluminum housing, Finn type backside design, Excellent heat dissipation.



✓ Reflector, Full PC reflector, Not easily deformed, Longer lifetime



✓ LED Chips, SANAN chips, 2835 SMD chips, High lumen efficiency, Stable performance, our standard lumen is 80LM/W for this series.

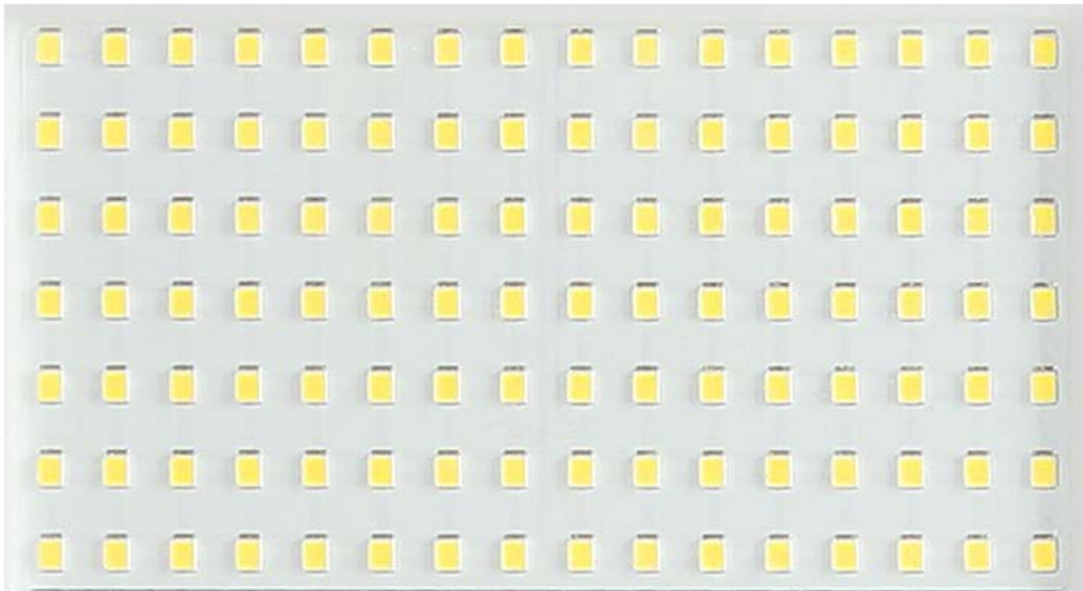


Cable wire, VDE H05RN-F, 3*1.0mm² Rubber cable, meet the requirement of IEC standard.




✓ Surge protection can pass 2KV to avoid the Lightning surge.

✓ Do 1.5KV withstand voltage test.

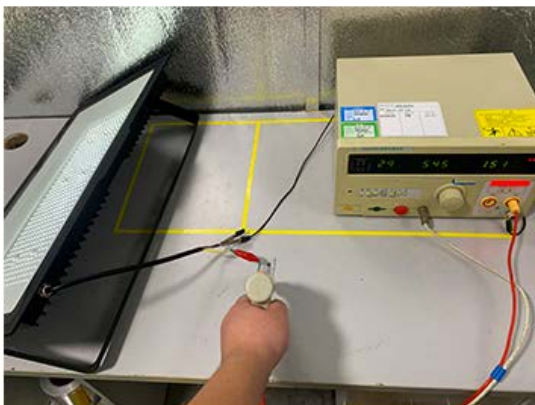

✓ Packages: 1PC with inner box, it will put foam in front of big watts like 200W to protect the glass to avoid damage.

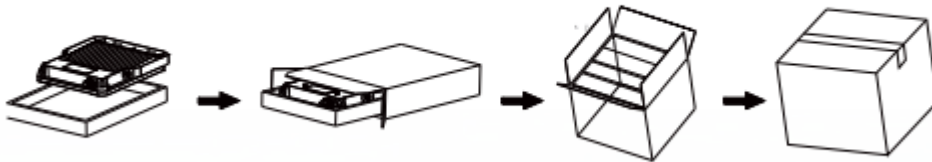

✓ Application

RUNWIN **Economic LED Floodlight** S-lite 2 can be widely used in the sports field, front or back yards, tunnels, advertisement billboard, building, gyms, workshop, station, park, toll station, factories, expressway, garden, Construction Building, and many other places.



Note: This Floodlight Can Resist Natural Rain,But It Cannot Used As An Underwater Lamp.

